




PREMIUM IN COMFORT AND EFFICIENCY

Daiseikai 10



Highlights

A+++ for cooling and heating
 Dust filter, plasma ionizer and Ultra Pure filter
 WiFi module integrated as standard
 Energy Monitoring, HADA Careflow, Smart Sensing

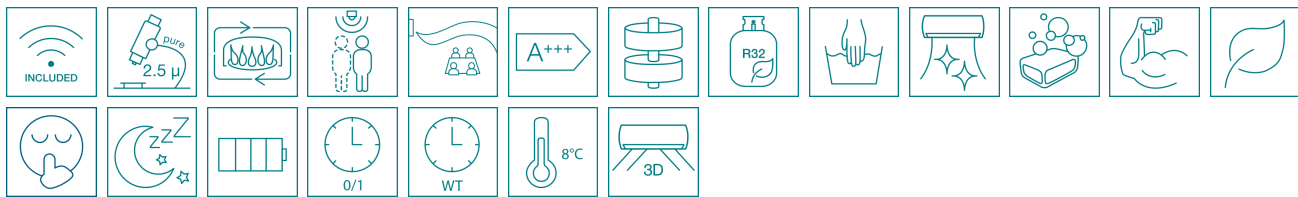

DAISAIKAI 10 stands for innovative design, high efficiency and maximum comfort. Almost too good just for cooling or heating. Room air is moved and cleaned at the highest level.



Product advantages

- Highest energy efficiency (A+++)
- Direct current hybrid inverter technology
- Particularly high efficiency in the partload range
- Whisper mode for indoor & outdoor unit
- WiFi adapter integrated as standard
- Draught-free comfort: 3D Airflow
- Intelligent air flow: HADA Careflow
- Motion detection through SMART SENSING



Conserving resources

- ECO mode
- Air as energy source in heating mode
- Low-GWP refrigerant R32



Clean room air

- Washable dust filters that cover the entire heat exchanger
- "Magic Coil" coating on the heat exchanger fins
- Self-cleaning function dries the heat exchanger at the end of operation
- Highly effective Ultra Pure filter of particle class 2.5 μ
- Ozone air purifier with ionizer
- Optional active carbon catechin filter strips (Art. 818F0023)
- Optional IAQ filter strips (Art. 818F0036)



Operation & features

- Conveniently operated design infrared remote control included
- Standard APP control via smartphone or tablet
- Smart speaker GOOGLE Assistant and AMAZON Alexa compatible
- Weekly timer with 4 freely programmable settings/day
- 28 time programs per week
- Automatic mode
- Heating adjustable up to +30°C
- Hi Power, Power Select
- QUIET operating mode for indoor unit
- SILENT operating mode for outdoor unit
- 3D airflow with 6 airflow patterns
- ECO operating mode
- 8°C frost protection function, Fireplace mode
- SMART SENSING with touch control and motion-guided control of the airflow
- Automatic restart after power failure adjustable



WiFi special features

- One indoor unit can be operated by up to 5 users
- Up to 10 indoor units can be operated by one user
- Combine units in up to 3 groups/zones
- Indoor and outdoor temperature display
- Child lock
- Multilingual APP: DE, EN, CZ, HR, HU, SI, SK adjustable



Daiseikai 10 / SET

Indoor unit	RAS-B13S4KVDG-E		
Outdoor unit	RAS-13S4AVPG-E		
Cooling capacity	kW	❄️	3,50
Cooling range (min.-max.)	kW	❄️	0,90 - 4,20
Power consumption (min./nom./max.)	kW	❄️	0,20/0,80/1,10
Energy efficiency EER	W/W	❄️	4,38
Energy efficiency SEER		❄️	9,70
Energy efficiency class		❄️	A+++
Annual electricity consumption	kWh/a	❄️	126
Outdoor temperature operating range (min.-max.)	°C	❄️	-15/+46
Heating capacity	kW	☀️	4,00
Heating range (min.-max.)	kW	☀️	0,70 - 6,30
Power consumption (min./nom./max.)	kW	☀️	0,18/0,80/1,60
Pdesign h	kW		3,60
Energy efficiency COP	W/W	☀️	5,00
Energy efficiency SCOP		☀️	5,20
Energy efficiency class		☀️	A+++
Annual electricity consumption	kWh/a	☀️	969
Outdoor temperature operating range (min.-max.)	°C	☀️	-20/+24

Indoor unit	RAS-B13S4KVDG-E		
Sound pressure level (low/med/high)	dB(A)	❄️	26/--/41
Sound pressure level (low/med/high)	dB(A)	☀️	24/--/42
Sound power level	dB(A)	❄️	54
Sound power level	dB(A)	☀️	55
Airflow	m ³ /h		330-750
Condensate pipe diameter	mm		VP13
Dimensions (HxWxD)	mm		293 x 940 x 257
Weight	kg		16

❄️ Cooling ☀️ Heating



Daiseikai 10 / SET

Outdoor unit	RAS-13S4AVPG-E		
Power supply	V/Ph+N/Hz		220-240/1+N/50
Recommended fusing	A		10
Recommended power supply line type			H07RN-F 3G1,5
Communication line			H07RN-F 4G1,5
Sound pressure level (low/med/high)	dB(A)	❄️	--/--/45
Sound pressure level (low/med/high)	dB(A)	🔥	--/--/46
Sound power level	dB(A)	❄️	58
Sound power level	dB(A)	🔥	59
Suction gas pipe diameter	mm (inch)		9,5 (3/8)
Liquid pipe diameter	mm (inch)		6,3 (1/4)
Pipe length (min.)	m		2
Pipe length (max.)	m		25
Height difference (max.)	m		15
Airflow	m ³ /h		2160
Compressor type			Twin-Rotary
Refrigerant			R32
Refrigerant charge	kg		0,96
Pre-charged up to	m		15
Added refrigerant charge	g/m		20
Dimensions (HxWxD)	mm		630 x 800 x 300
Weight	kg		38

❄️ Cooling 🔥 Heating

The measuring conditions for this product can be found at <https://www.toshiba-aircondition.com/en/measuring-conditions.html>

Accessories	Description
Fernbedienung	Infrared remote control included
818F0023	Active carbon-catechin filter strips
818F0036	IAQ filter strips
818F0072	Ultra-Fresh filter strips
TCB-IFCB5-PE	External on/off PCB, window contact module
TCB-PX100-PE	Casing for outdoor installation of window contact module for high-wall units



In order to make it easier for you to select the optimal product, you can find the description of the special TOSHIBA product functions for your model here:



WiFi included: WiFi adapter integrated.



Ultra Pure Filter: Filtration of 94% of particles up to 2,5 μm.

Swing mode: Swing function of the louvers.



Fireplace Mode: Recirculation mode distributes heat from other heating sources.



Presence Sensor: Energy saving depending on persons presence or absence in the room.



Care Flow: This function moves the air flow without drafts in the room.



Energy Label A+++: Energy efficiency class A+++ guarantees the lowest power consumption and the highest efficiency!



Twin rotary compressor: Long-lasting, smoothly running and highest efficiency.



R32: Used refrigerant: R32.



Dust filter: Washable filter against coarse contamination.



Ozone Air Purifier / Ionizer: Ozone molecules act against smells, viruses, bacteria and allergens.



Self-cleaning function: Usage of condensate water for cleaning.



HI POWER: Particularly strong airflow for quickly reaching the requested temperature.



Eco Mode: Energy saving function.



Quiet Mode: Whisper mode for the indoor unit.



Comfort Sleep: Gradual increase of temperature by 2 °C until morning.



Power Selection: Capacity regulation and therefore power savings of up to 25, 50 or 75%.



Timer: Individual programming of on-/off times.



Week Timer: Up to four settings per day and seven per week.



8°C Antifreeze Protection: Protects unoccupied rooms.



3D Airflow: 3D air circulation in six individual possibilities.

