


TOSHIBA



COMFORT ALLROUNDER

High-wall unit R32/R410A

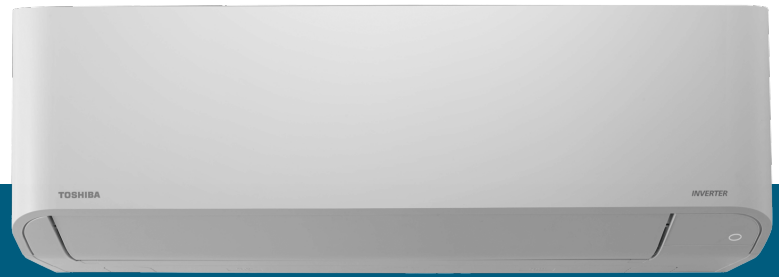

Highlights

- Modern, compact design
- Comfort features taken from the domestic sector
Preset, Quiet, Hi Power, Comfort Sleep
- Infrared remote control included



High-wall unit for RAV single-room systems for combination with Digital Inverter, Super Digital Inverter, and BIG Digital Inverter outdoor units for refrigerant R32 or R410A. With their unobtrusive design, these high-wall units are ideal for offices, shops, hotels, plant rooms, restaurants, etc. Available in four power levels from 2.5 to 6.7 kW.



Performance

- Suitable for 24-hour continual operation
- High energy efficiency
- High-performance heat exchanger
- Self-cleaning function dries the heat exchanger after operation
- Low-noise 5-stage fan
- Auto diagnostic system



Technical details

- Can be combined with all cable remote controls
- Integrated TCC link interface
- Can be integrated into VRF control systems via a TCC link
- Automatic restart setting after power outage
- Optional redundancy box available
- Refrigerant lines can be connected from 3 sides



Flexibility

- Compatible with R32 or R410A outdoor units
- Large air control fin
- Optimal air distribution, even in large spaces
- Easy-to-remove, washable dust filters
- "Easy Cleaning" design



Easy operation

- Infrared remote control included
- 24-hour timer
- Automatic mode
- Hi Power
- Quiet
- Preset
- Comfort Sleep
- Optional WiFi control via smartphone, tablet, or PC



High-wall unit R32/R410A

Technical data			RAV-RM561KRTP-E
Cooling capacity	kW	❄️	5,00
Cooling range (min.-max.)	kW	❄️	1,50 - 5,60
Power consumption (min./nom./max.)	kW	❄️	0,19/1,43/1,98
Energy efficiency EER	W/W	❄️	3,01
Energy efficiency SEER		❄️	6,19
Energy efficiency class		❄️	A++
Heating capacity	kW	🔥	5,30
Heating range (min.-max.)	kW	🔥	1,50 - 6,30
Power consumption (min./nom./max.)	kW	🔥	0,16/1,39/2,76
Energy efficiency COP	W/W	🔥	3,42
Energy efficiency SCOP		🔥	4,00
Energy efficiency class		🔥	A+
Sound pressure level (low/med/high)	dB(A)	❄️	35/39/42
Sound pressure level (low/med/high)	dB(A)	🔥	35/39/42
Sound power level	dB(A)	❄️	50/54/57
Sound power level	dB(A)	🔥	50/54/57
Airflow	m ³ /h		680/830/960
Refrigerant			R32/R410A
Dimensions (HxWxD)	mm		320 x 1050 x 250
Weight	kg		14

❄️ Cooling 🔥 Heating

The measuring conditions for this product can be found at <https://www.toshiba-aircondition.com/en/measuring-conditions.html>



In order to make it easier for you to select the optimal product, you can find the description of the special TOSHIBA product functions for your model here: In order to make it easier for you to select the optimal product, you can find the description of the special TOSHIBA product functions for your model here:



Energy Label A++: Energy efficiency class A++ guarantees a very low power consumption.



R410A: Used refrigerant: R410A.



R32: Used refrigerant: R32.



Dust filter: Washable filter against coarse contamination.



Self-cleaning function: Usage of condensate water for cleaning.



Auto Mode: Automatic selection between cooling and heating.



HI POWER: Particularly strong airflow for quickly reaching the requested temperature.



Auto diagnostic: Check of system for flawless operation.



Quiet Mode: Whisper mode for the indoor unit.



Comfort Sleep: Gradual increase of temperature by 2 °C until morning.



Preset Mode: Activates individual settings at the touch of a button.



Timer: Individual programming of on-/off times.



Automatic Restart: After a power blackout.

